



Submersible Propeller Pumps AB

Realization of low pump head and large water volume by use of an axial-flow impeller



Applications

- Water circulation for oxygen replenishing and water supply and drainage in fishponds.
- Irrigation of rice fields etc.
- Drainage of large water volumes with improvement work for irrigation ditches etc.
- Transport to bypass waterways
- Water supply and drainage for pools, ponds, etc.




Amenics
Amenities from Technology
for People and The Earth

Power-saving type providing a large discharge volume with low-head specifications.

Features



Anti-wicking Block

Gaps between lead cores are sealed to prevent ingress of water into the motor caused by water traveling along lead cores by capillary action.





Dual Inside Mechanical Shaft Seal

A double-face mechanical seal is located in an oil chamber and is lubricated and cooled by the oil. Unlike systems in which a mechanical seal is installed in the pump casing, the seal does not rely on lubrication by the pumped media. This eliminates premature wear or corrosion of the seal caused by lubrication of pumped media.

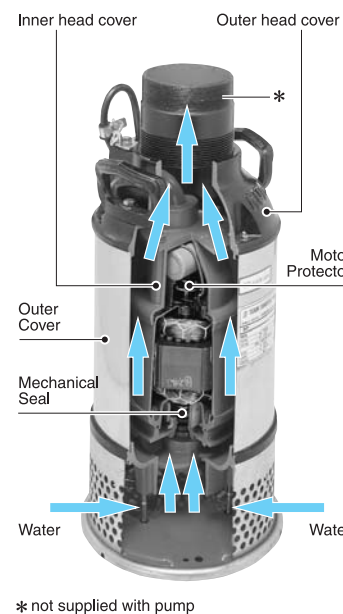

* not supplied with pump

Performance curves

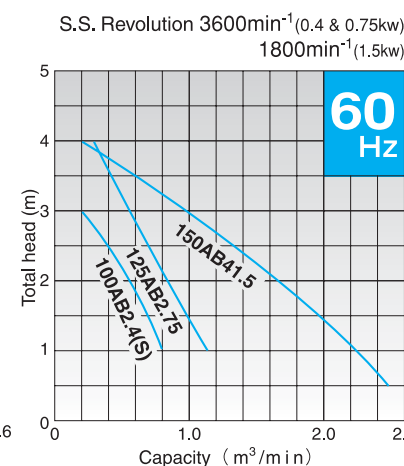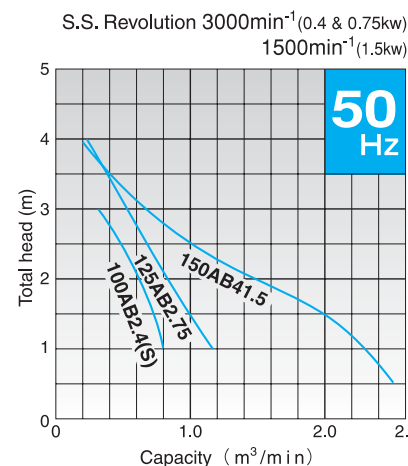

Specifications 50/60Hz

Discharge Bore (mm)	Model	Motor Output (kW)	Phase	Starting Method	Revolution 50Hz / 60Hz (min ⁻¹)	Max. Head (m)	Max. Capacity (m ³ /min)	Dry Weight (kg)	Standard Cable Length (m)	Dimensions (mm)		
										D	H	C.W.L. (mm)
100	100AB2.4S	0.4	Single	Capacitor Start	3000/3600	3	0.8	18	5	250	475	180
100	100AB2.4	0.4	Three	D.O.L.	3000/3600	3	0.8	18	5	250	475	180
125	125AB2.75	0.75	Three	D.O.L.	3000/3600	4	1.1	19	5	250	475	180
150	150AB4.1.5	1.5	Three	D.O.L.	1500/1800	4	2.5	44	6	272	580	300

● Dry weight of the pump excluding cable.

Major Standard Specifications

Item	Discharge bore size mm			
	100	125	150	
Pumping fluid	Type of fluid	River water, Agricultural water		
	Liquid temperature	0~40°C		
Pump	Components	Impeller	Axial-flow	
		Shaft seal	Double mechanical seal	
	Bearing	Shielded ball bearing		
	Impeller	Gray iron casting		
	Outer cover	Stainless steel #304		
	Head cover	Gray iron casting		
Materials	Casing	Gray iron casting		
	Shaft seal (mechanical seal)	Top seal face: Ceramic + Carbon, Bottom seal face: Ceramic + Silicon Carbide (0.4, 0.75kw) Silicon Carbide + Silicon Carbide (1.5kw)		
Motor	Type, poles	Dry-type submersible induction motor, 2 and 4 poles		
	Insulation	Class E		
	Phase / Voltage	Single-phase /110V, 115V, 220V, 230V, 240V Three-phase /220V, 230V, 380V, 400V, 415V, 440V, 460V		
	Motor protector (Built-in)	Circle thermal protector		
	Lubricant	Turbine oil (ISO VG32)		
	Materials	Frame	Steel plate, Gray iron casting (1.5kw)	
Head cover		Aluminum alloy casting, Gray iron casting (1.5kw)		
Shaft		Stainless steel #403		
Cable		PVC Sheath		
Discharge connection	Parallel pipe threads			


Standard Accessories

- Cabtyre cable..... 1pc

Optional Specifications

- Extended cable

Dimensions

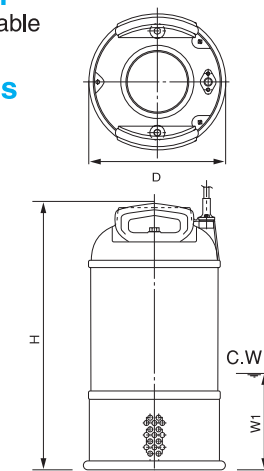

C. W. L. : Continuous Running Water Level